

SOASTA 55.04 (CloudTest/TouchTest 8023.63)

June 24, 2015

Table of Contents

| | |
|---|----|
| SOASTA 55.04 (CloudTest/TouchTest 8023.63) | 1 |
| Features | 1 |
| Updated Platform User Interface | 1 |
| New Login Page | 2 |
| New Resources page replaces the Welcome page | 3 |
| New Central Tabs and Tab Control | 4 |
| Share Dashboard URL | 5 |
| Enhancements | 6 |
| CloudTest | 6 |
| Configuring default Conductor security settings (93752) | 6 |
| Updating Security Protocol Settings | 6 |
| Updating Conductor's Protocols on Windows | 6 |
| Updating Conductor's Protocols on Mac OS X..... | 7 |
| Updating Conductor's Protocols on Linux | 7 |
| New "Create a Transaction" right-click option for WebSocket elements (87711) | 8 |
| New Select Seed Data button (84991) | 9 |
| New Users & Groups columns for Created and Last Modified (85542) ... | 10 |
| Globe: Timely update for Sun, clouds, lighting, & Starfield (82043) | 10 |
| Globe: Use 8k / 3 hour clouds (82042) | 10 |
| Have Cache Dynamic Resources Enabled as default (80479) | 11 |
| New Collection Rate Per Second in Fundamentals (77630) | 13 |
| New Charting Series Limit server setting (50916)..... | 13 |
| TouchTest | 14 |
| Defining Third-Party Cookie Exceptions for NTTR Remote TestKit (94130) | 14 |

| | |
|---|----|
| Allowing Third-Party Cookies in Google Chrome..... | 14 |
| Allowing Third-Party Cookies in Internet Explorer | 15 |
| Allowing Third-Party Cookies in Firefox..... | 18 |
| Allowing Third-Party Cookies in Safari..... | 20 |
| New Allow App To Save State before Termination setting in Mobile Targets (91237) | 21 |
| Bugs Fixed | 22 |
| CloudTest | 22 |
| TouchTest | 31 |

SOASTA 55.04 (CloudTest/TouchTest 8023.63)

Features


Updated Platform User Interface

CloudTest and TouchTest users will see some notable User Interface updates in this release, including:

- New SOASTA colors
- New Login page with easy links to Resources, Forums, and Support
- New Localization drop-down for easy language selection
- New Account drop-down to identify the currently logged in user, SOASTA's web site, and the About page for access to product version and update notification, as well as Logout.
- New, streamlined Central tabs now share the main navigation bar with the product logo, Localization drop down, as well as the Account drop down
- New, streamlined Composition Editor tabs now also appear in the

New Login Page


CloudTest and TouchTest users in this release will notice our new look-and-feel as soon as they hit the Login page (shown below), which prominently includes links to a new, streamlined Resources page, to the CloudLink Forum, as well as to SOASTA Support.

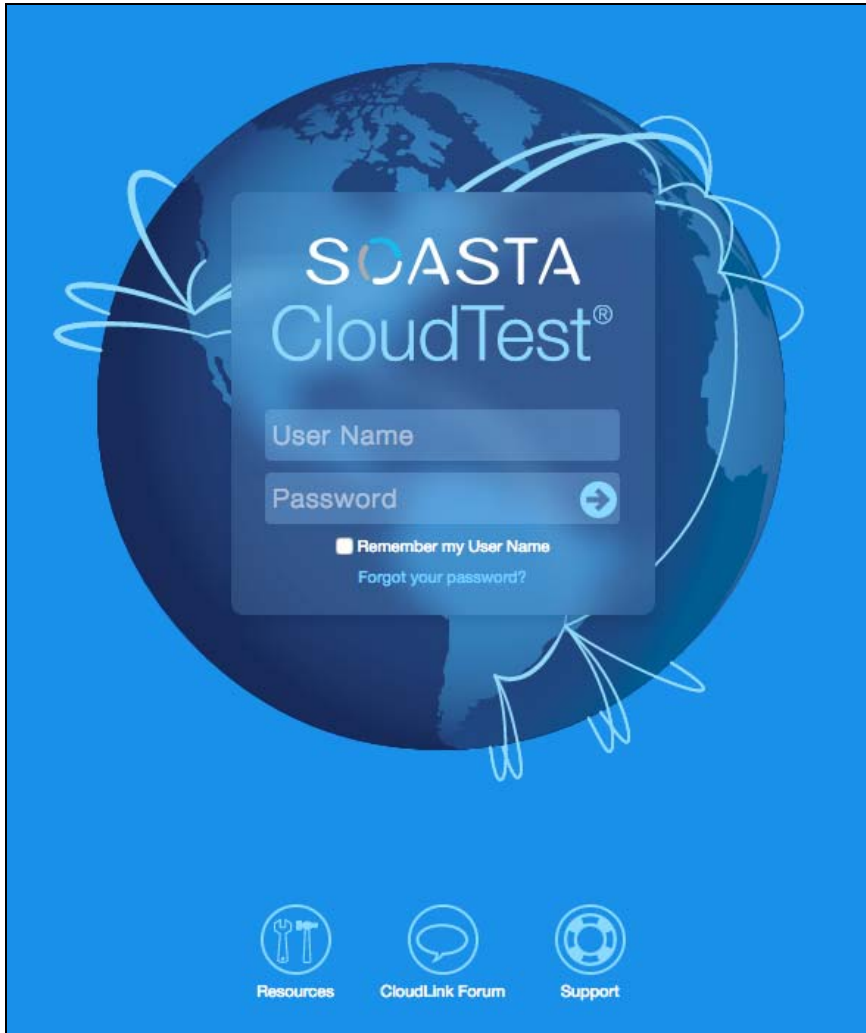


New Resources page replaces the Welcome page

The Resources page replaces the newly retired Welcome page tab in this release, and is clearly visible from the Login page, which requires no Login for user access.

Additionally, users can access the Resources page from the bottom of the navigation tree after Login (shown below).

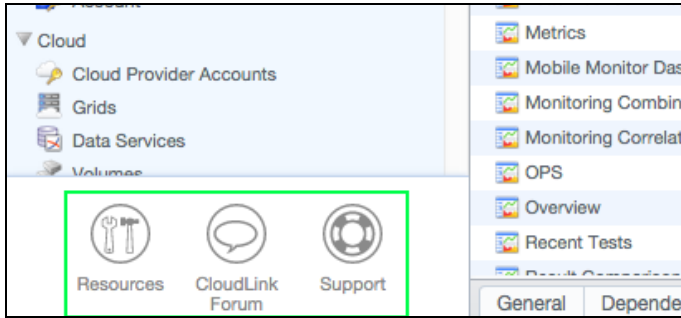

Downloads relevant to the current product are now provided on the Resources page with confusing links meant for other SOASTA platform products eliminated.

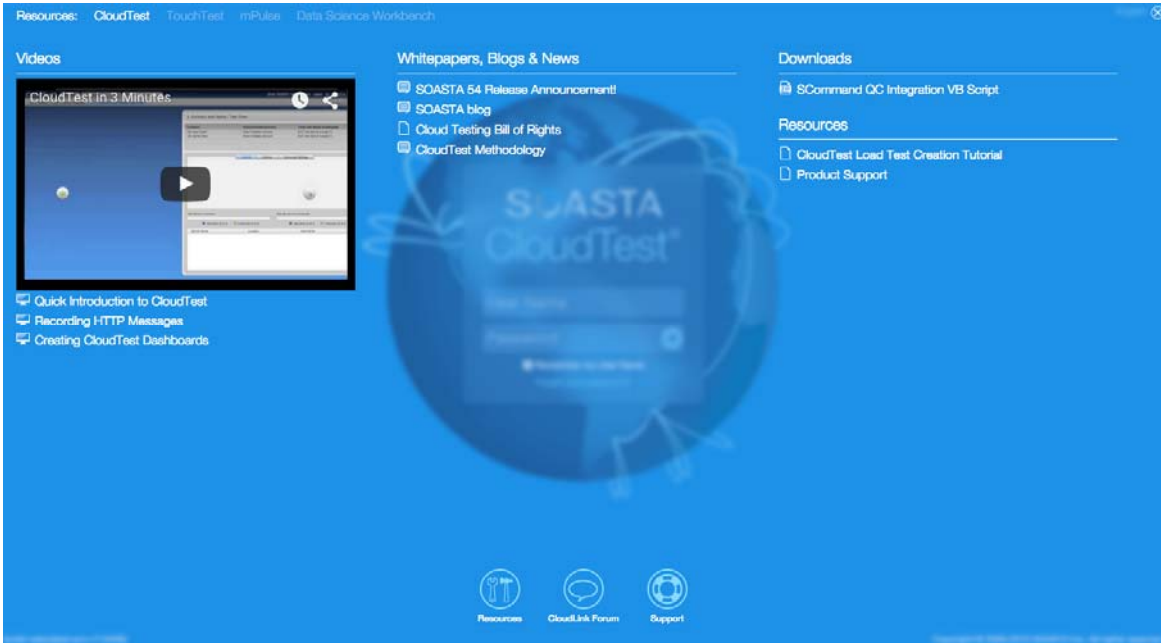

Resource page content includes introductory Videos, helpful Whitepapers, Blogs, and News pertinent to the product.


Other notable User Interface improvements in this release include:

New Central Tabs and Tab Control

The new Central tabs are contained within the blue breadcrumb bar along the top of the window, where they take up considerably less of your screen's real estate.



The tab redesign includes a new permanently place drop-down for Tab Control

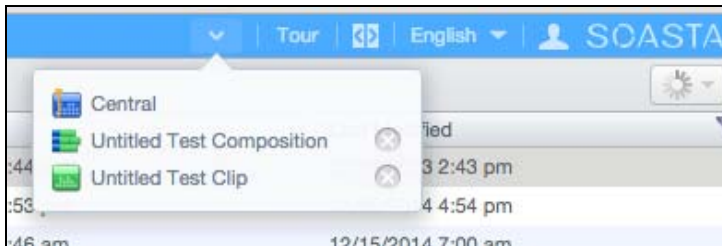


Share Dashboard URL

SOASTA CloudTest and TouchTest users now have the ability to Share Dashboard URLs with other users, as well as to preserve a permanent link from the current dashboard in display, by clicking the new Share Dashboard icon that appears on all SOASTA dashboard toolbars.



Click this toolbar icon to access the Share Dashboard box.

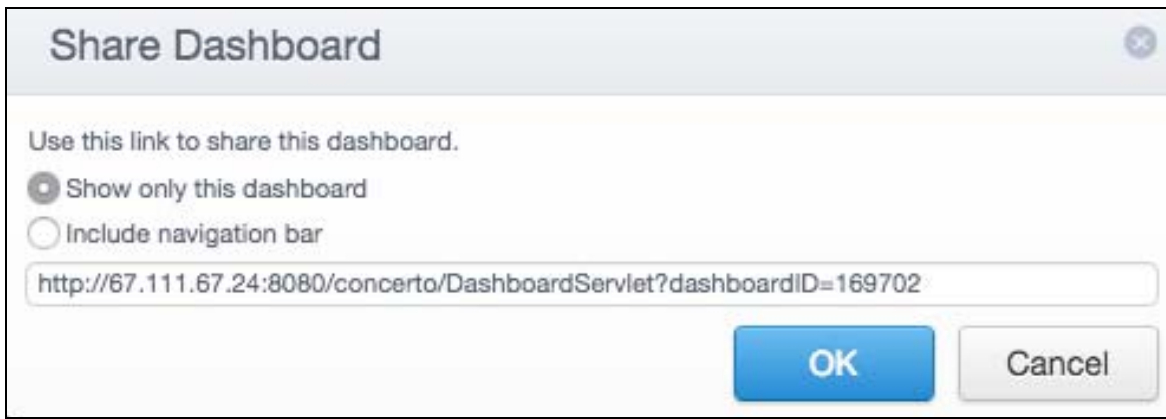

Users can choose between the following two options:

- *Only this dashboard* will open just the dashboard with no Central bar at the top
- *Include navigation bar* will also include a Central tab

Note: If there are results being used in the dashboard, then the result ids for those results will also be included in the permalink.

Enhancements

CloudTest

Configuring default Conductor security settings (93752)

In prior releases the SOASTA Conductor used only the `SSLv3` and `TLSv1` security protocols in order to establish secure website connections using `HTTPS`. This was true even after support for the additional security protocols, `TLSv1.1` and `TLSv1.2` a given (both were made possible by Java 7 support also introduced in CloudTest 54).

However, support for the `TLSv1.1` and `TLSv1.2` protocols have had some unexpected side effects—some servers that support only `TLSv1.1/TLSv1.2` will reject connection attempts using the older protocols, for security reasons – and in fact, this has caused Conductor connection attempts to be rejected in some cases.

As of CloudTest 55, the Conductor will now *also* use `TLSv1.1` and `TLSv1.2` for secure connections, in addition to the older `SSLv3` and `TLSv1` protocols. In some cases depending on the configuration of the HTTP server's security protocols, connections may be rejected.

In which case, the following steps can be used to override Conductor's OS-specific configuration to use the required security protocols.

Updating Security Protocol Settings

The following instructions describe how to revert the current `Dhttps.protocols` setting for your Conductor flavor. The examples used here demonstrate how to revert from the current 55 series settings to the prior 54 series settings. Conductor will only attempt connections using one of the protocols listed for .

Updating Conductor's Protocols on Windows

Add or subtract the desired flags in the configuration for SOASTA Conductor's Java Virtual Machine on Windows.

1. If Conductor is running, close it.
2. Create a Windows shortcut for SOASTA Conductor (if one doesn't exist) by navigating to:
`c:/Program Files (x86)/Soasta Conductor`
3. Right-click "SOASTA Conductor.exe" file, and then select the Send to -> Desktop (create shortcut) command.

4. Right click the created shortcut and then select "Properties."
5. Find the 'Target' field, and add the following text at the end:
`-J-Dhttps.protocols=SSLv3, TLSv1`
6. Click OK.
7. Double click the shortcut to restart Conductor.

Updating Conductor's Protocols on Mac OS X

Add or subtract the desired flags in the configuration for SOASTA Conductor's Java Virtual Machine on Mac OS X.

1. If Conductor is running, close it.
2. Right click Conductor.app and choose 'Show Package Contents'
3. Open the file 'Info.plist' within a text editor
4. Replace the line:

```
<string>-Dhttps.protocols=SSLv3, TLSv1, TLSv1.1, TLSv1.2</string>  
with:
```

```
<string>-Dhttps.protocols=SSLv3, TLSv1</string>
```

5. Save the file and then Restart Conductor.

Updating Conductor's Protocols on Linux

Add or subtract the desired flags in the configuration for SOASTA Conductor's Java Virtual Machine on Linux.

1. If Conductor is running, close it.
2. Navigate to the `Conductor/bin` folder.
3. Open the `Conductor` file using a text editor.
4. In the line that starts with:

```
CONDUCTOR_JAVA_OPTS
```

Replace the following:

```
-Dhttps.protocols=SSLv3, TLSv1, TLSv1.1, TLSv1.2
```


With:

```
-Dhttps.protocols=SSLv3, TLSv1
```

5. Save the file and then Restart Conductor.


New "Create a Transaction" right-click option for WebSocket elements (87711)

A new context menu command, Create a Transaction, is now provided for right-clicks on WebSocket elements, including WebSocket Open, WebSocket Close, and WebSocket Send elements.

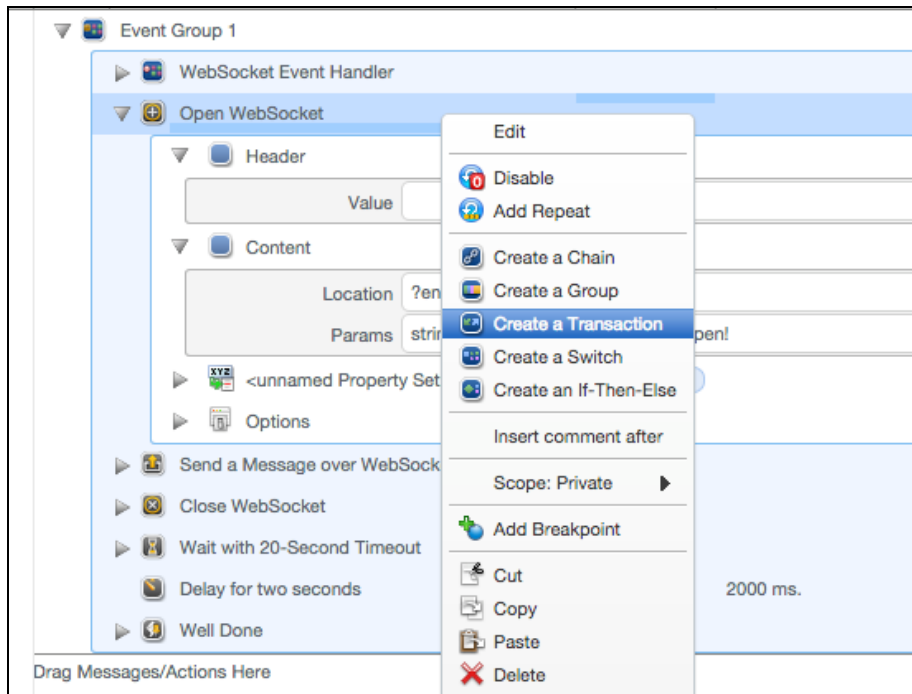


New Select Seed Data button (84991)

Users defining Custom Properties at the Track level, Clip level, as well as at the Container/Message/Action level will find a new Select Seed Data button that makes it easier to select from among existing Seed Data Objects.

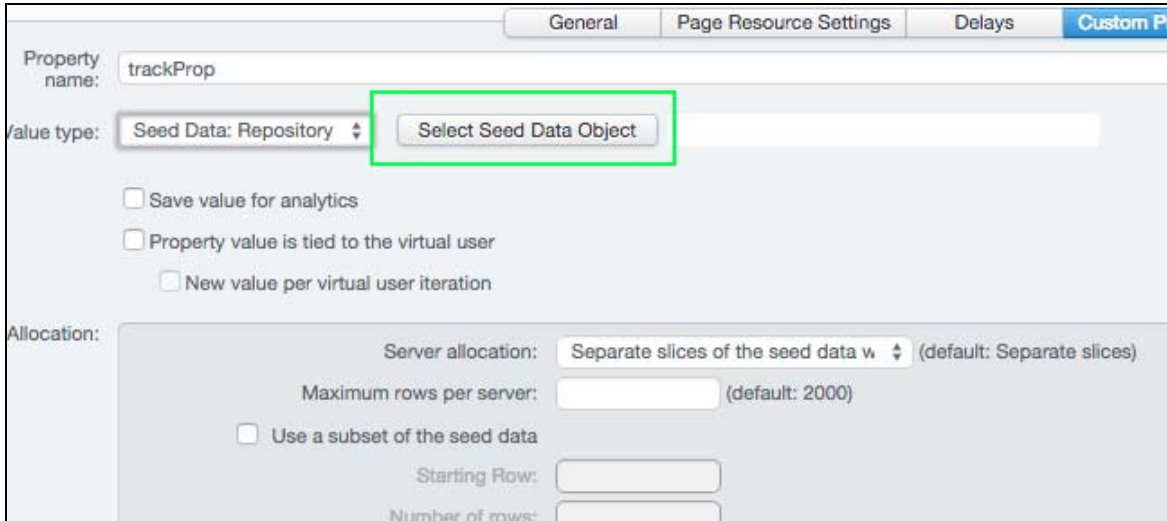

Clicking this button will launch the Seed Data Objects explorer box, which will allow users to more easily distinguish Seed Data Objects by location and name.

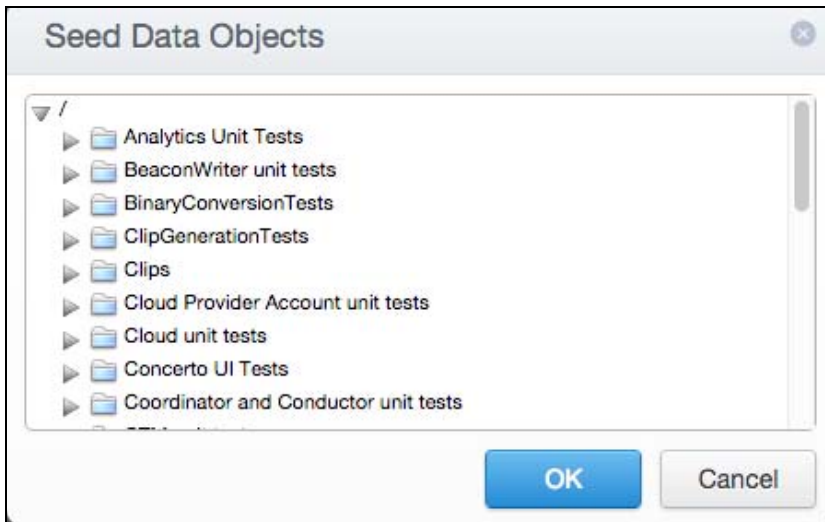

New Users & Groups columns for Created and Last Modified (85542)

The Central > Users & Groups list now supports additional underlying columns for Created (date) and Last Modified.

These new values are visible only when the Users & Groups list is exported in CSV format.

| | A | B | C | D | E | F |
|----|-------------|-------------------------|-------------------------|----------|--------------|---------|
| 1 | Name | Created | Last Modified | fullName | emailAddress | deactiv |
| 2 | SOASTA | 2013-10-07T13:44:45.369 | 2013-10-07T16:44:31.290 | | | FAI |
| 3 | admin | 2013-10-07T13:44:45.369 | 2013-10-07T16:20:38.823 | | | FAI |
| 4 | ci_ios_1 | 2013-10-07T17:03:59.485 | 2013-10-07T17:03:59.485 | | | FAI |
| 5 | ci_import_1 | 2013-10-07T17:04:30.335 | 2013-10-07T17:04:30.335 | | | FAI |
| 6 | ci_ios_2 | 2013-10-07T17:04:44.789 | 2013-10-07T17:04:44.789 | | | FAI |
| 7 | ci_ios_3 | 2013-10-07T17:05:03.209 | 2013-10-07T17:05:03.209 | | | FAI |
| 8 | ci_ios_4 | 2013-10-07T17:05:24.130 | 2013-10-07T17:05:24.130 | | | FAI |
| 9 | msharma | 2013-10-07T17:05:45.568 | 2013-10-07T17:05:45.568 | | | FAI |
| 10 | mu | 2013-10-07T17:21:39.213 | 2013-10-07T17:21:39.213 | | | FAI |
| 11 | tana@Mobil | 2013-10-07T17:21:39.216 | 2013-12-03T08:57:50.420 | | | FAI |
| 12 | guest@Mobi | 2013-10-07T17:21:39.221 | 2013-10-07T17:21:39.221 | | | FAI |
| 13 | user-1@Mob | 2013-10-07T17:21:39.225 | 2013-10-07T17:21:39.225 | | | FAI |
| 14 | user-2@Mob | 2013-10-07T17:21:39.230 | 2013-10-07T17:21:39.230 | | | FAI |
| 15 | user-3@Mob | 2013-10-07T17:21:39.234 | 2013-10-07T17:21:39.234 | | | FAI |
| 16 | user-4@Mob | 2013-10-07T17:21:39.239 | 2013-10-07T17:21:39.239 | | | FAI |

Globe: Timely update for Sun, clouds, lighting, & Starfield (82043)

This release includes various improvements to the timely display of the Sun, clouds, lighting, and the Starfield background that users will find to be more responsive during Globe rotation, and particularly so on larger displays.


Globe: Use 8k / 3 hour clouds (82042)

This release also includes improvements to the use of clouds in the Globe widget display.


Have Cache Dynamic Resources Enabled as default (80479)

In all prior releases, the default Clip-wide “Page Resource Settings,” Dynamic Cache override setting was set to *disabled*—meaning that CloudTest did not automatically cache dynamic resources for reuse as most browsers do.

Now, Page Resource Settings are *enabled*, which will better mimic what real browsers do. Users can still disable the caching of dynamic resources and all the usual override logic is the same. The default Composition-level setting trumps all (it's default is to *Use Individual Clip Settings*), while Track overrides Clip, and the Clip setting applies only to the Clip itself and its repeats.

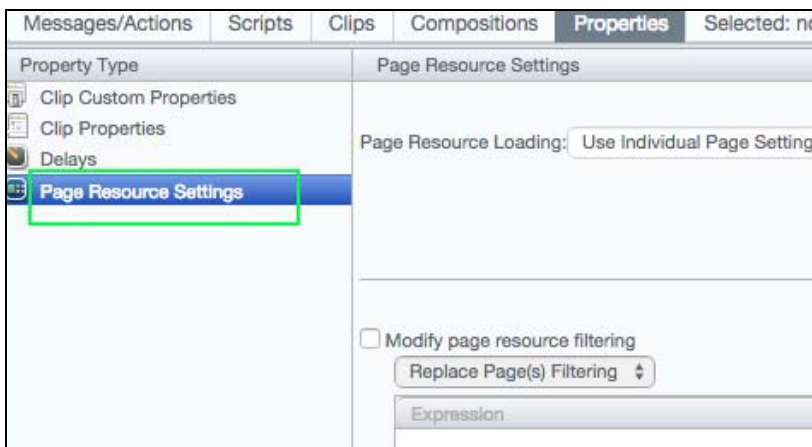

Note: Page Resource Settings are found in the Clip Editor lower panel Properties tab and are clip wide. Whenever Page Resource Settings is selected the relevant settings appear on the right (as shown below). For more about this important page setting, see [Cache Dynamic Resources \(Clip, Track, or Composition\)](#).

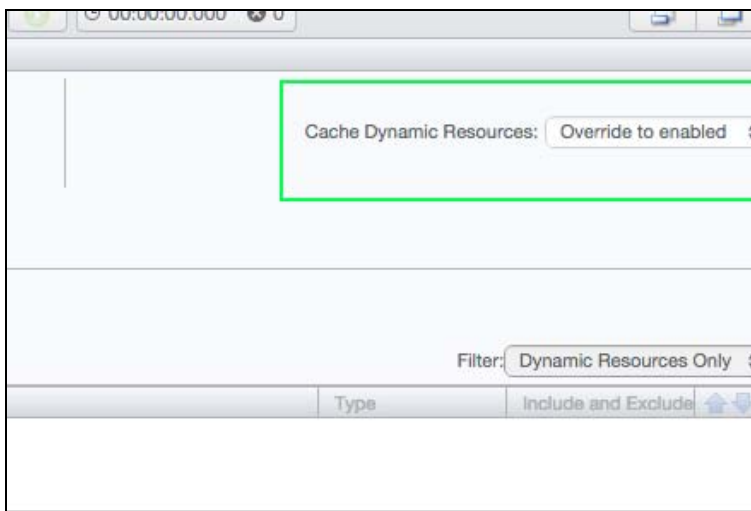


New Collection Rate Per Second in Fundamentals (77630)

The Fundamentals summary widget now provides an additional ability to track all Collection types **Per Second** via the Collection Rate form.

Previously, the Collection Rate provided rates only for Collections *per minute* and Collections *per hour*.

So, for example, to track Transactions per Second (shown below) simply define an Expression using that collection type and combine it with the new per Second value on the right.

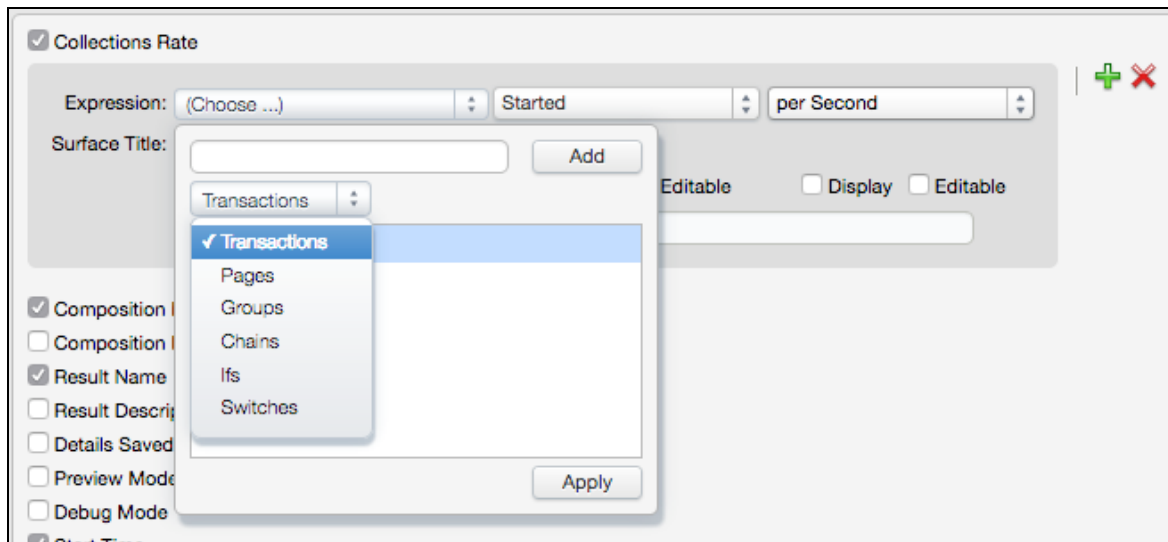

New Charting Series Limit server setting (50916)

This release introduces a new Series Limit server setting, *ResultsService.Config.Charting.ChartSeriesLimit*. This setting—whose default is set to 100 series—should be changed sparingly, but in some cases can be useful if the maximum number of series displayed has been exceeded.

TouchTest

Defining Third-Party Cookie Exceptions for NTTR Remote TestKit (94130)


Users whose browser settings blocked third-party cookies were unable to login to TouchTest's embedded integration with NTT Remote TestKit.

TouchTest users must create a browser-specific exclusion for the NTT Remote TestKit using the following per-browser steps.

Refer to [SOASTA Supported Browsers and Resolution](#) for a full list of browsers in use with TouchTest and other SOASTA products.


Allowing Third-Party Cookies in Google Chrome

1. Open Google Chrome's browser Preferences (e.g. File > Preferences).
2. Click Show advanced settings...
3. In the Privacy section, click Content Settings.

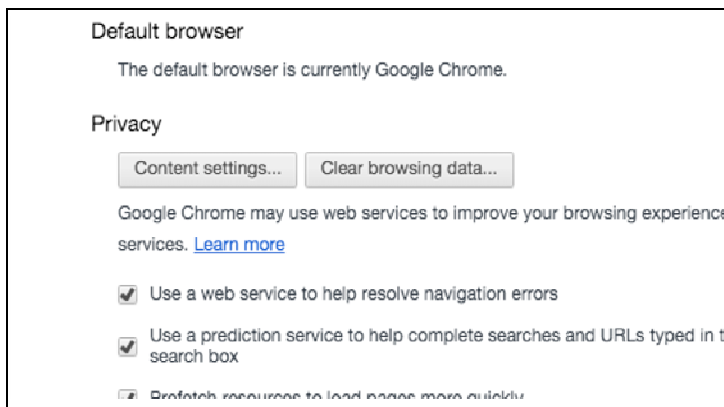


TIP: Depending on your browser version, the UI shown as examples here may vary slightly.

4. In the Content settings box, Cookies section, click Manage exceptions...

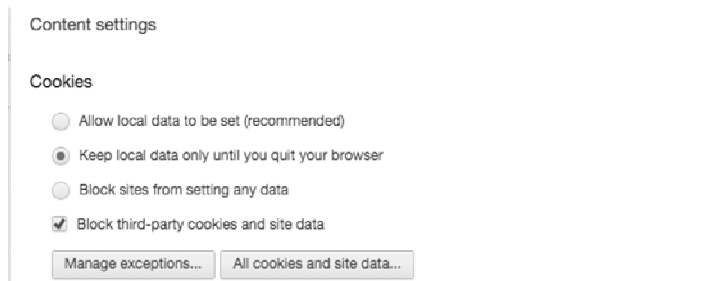


5. In the Hostname pattern field, enter the *domain* of your TouchTest URL, and ensure that Behavior is set to *Allow* the domain.

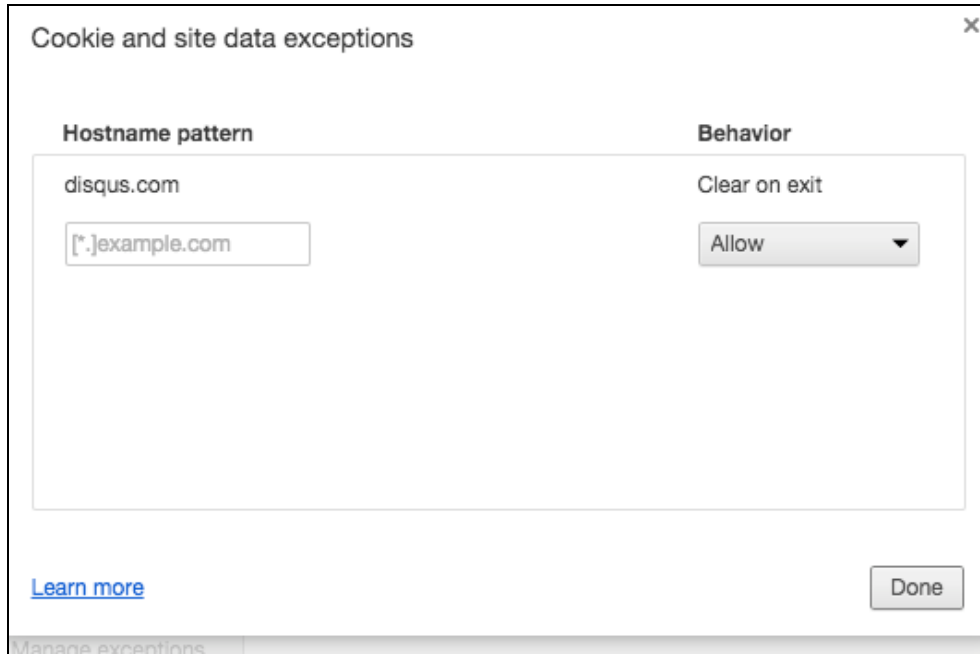


Allowing Third-Party Cookies in Internet Explorer

1. Click Internet Explorer's Settings icon (e.g. the Gear icon) and choose Internet Options.

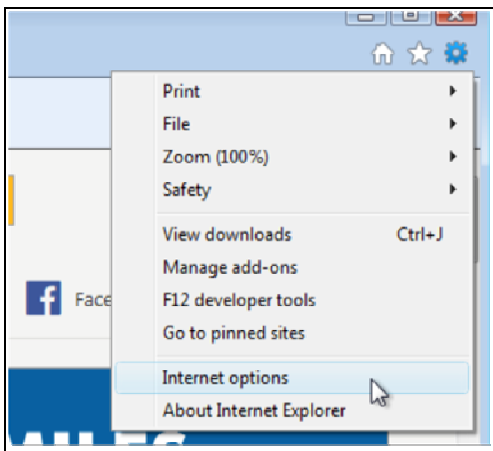


1. In the Internet Options box, click the Privacy tab.
2. In the Privacy tab, Settings section, if *Accept All Cookies* is not the Privacy level, then define an exception by clicking the enabled *Sites* button.

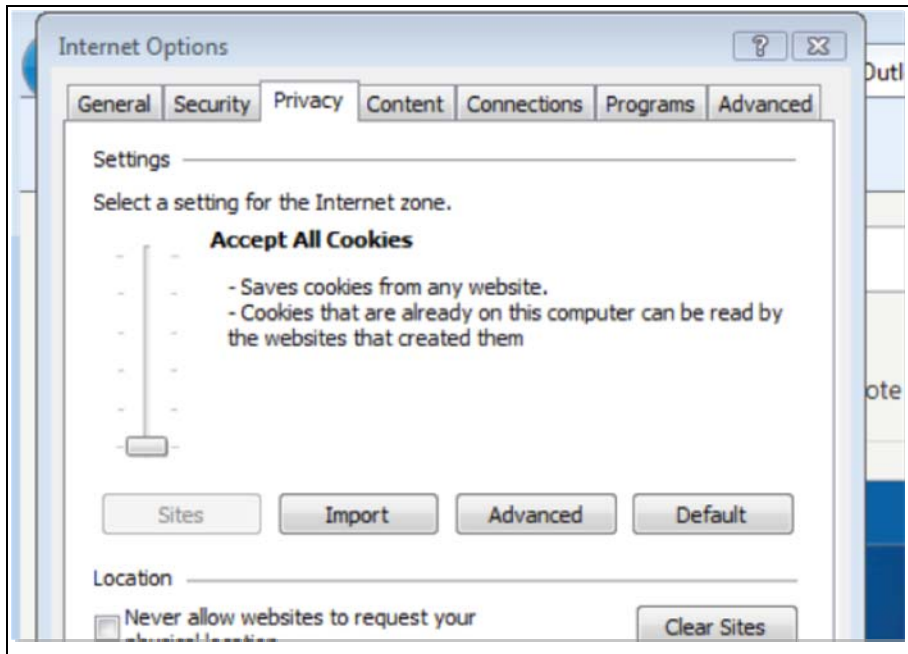


TIP: Depending on your browser version, the UI shown as examples here may vary slightly.

3. In the Per Site Privacy Actions box, type the *domain* of the TouchTest URL.

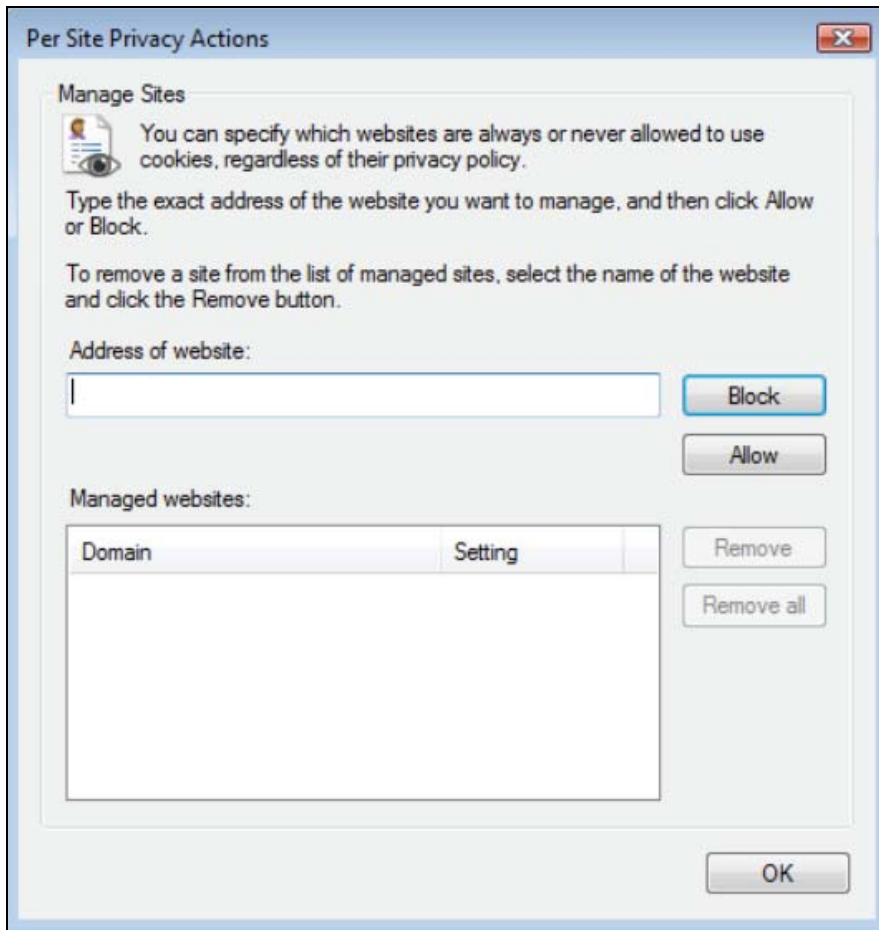


Allowing Third-Party Cookies in Firefox

1. Click Firefox's Menu button (e.g. the Gear icon) and choose Preferences.

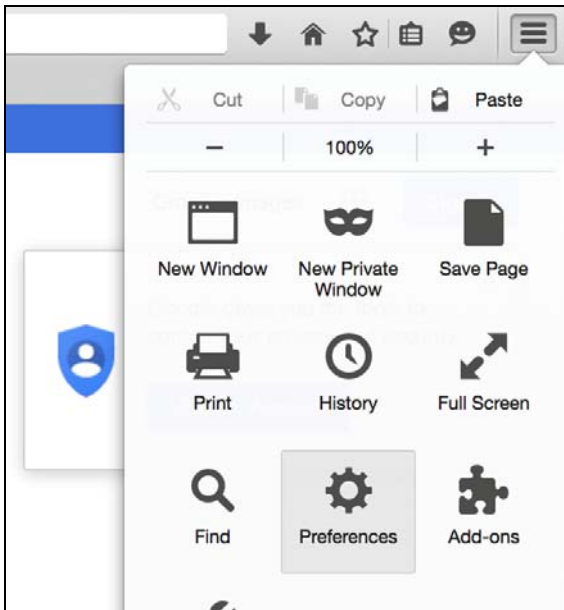


2. Click the Privacy panel.
3. In the Privacy panel, History section, if *third-party cookies* is set to *Never*, then you must define a cookie exception by clicking the Exceptions button.

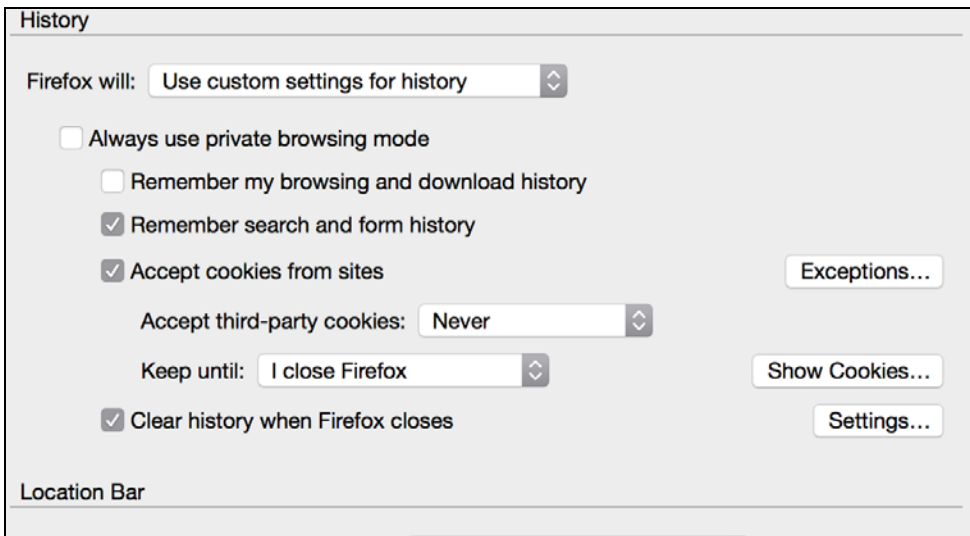


TIP: Depending on your browser version, the UI shown as examples here may vary slightly.

4. In the Exceptions – Cookies box, enter the *domain* of the TouchTest URL to use, and then click Allow.

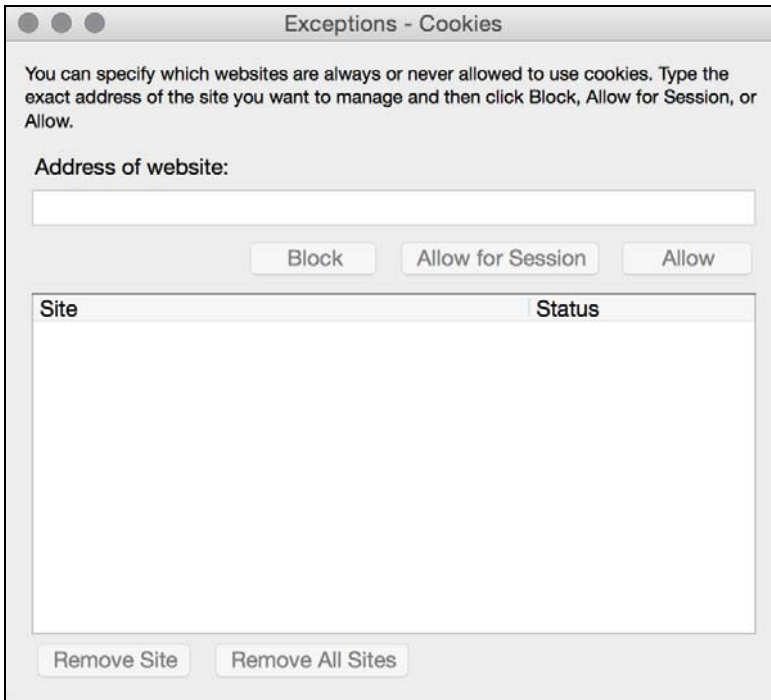

Allowing Third-Party Cookies in Safari


1. Open Safari's browser Preferences (e.g. File > Preferences).
2. Click the Privacy tab.
3. In the Cookies and website data section, ensure that Always Block is **not** set.

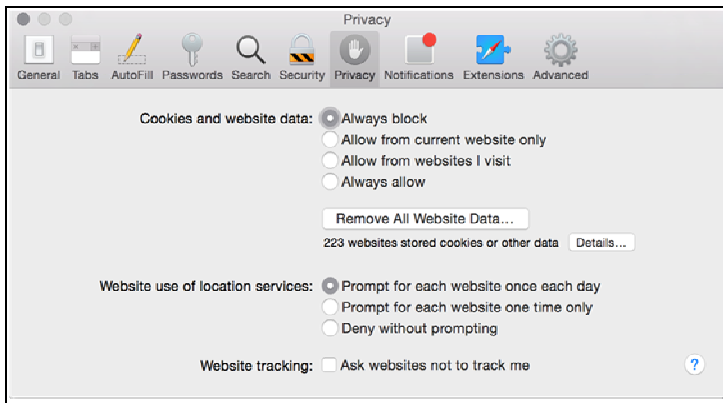

TIP: Depending on your browser version, the UI shown as examples here may vary slightly.

New Allow App To Save State before Termination setting in Mobile Targets (91237)

This release introduces a new mobile target setting that permits users to preserve the state in a mobile app before terminating that app (if the app itself permits it).

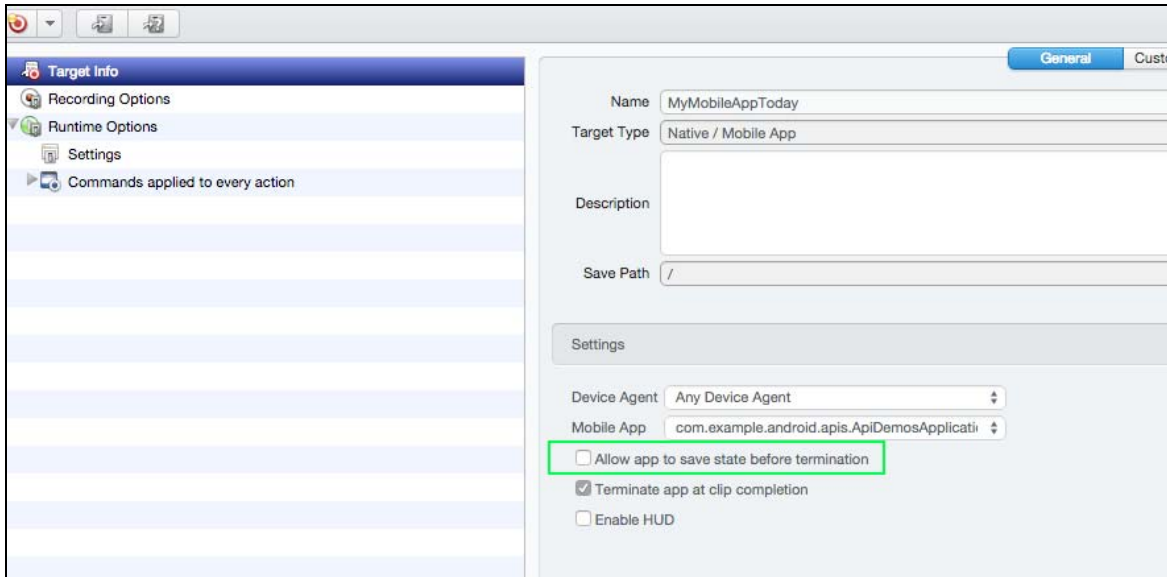

Bugs Fixed

CloudTest

94432: SSL server certificate cannot be verified

An SSL server certificate was not being verified due to a settings issue.

94376: Expired Certificates causing CertificateExpiredException on playback

In SOASTA 55.02, playback of a clip halted if an expired certificate was encountered.

94092: Resources in Jar files without extensions are not loaded

An attempt to load a resource from a Jar that did not contain a file extension into a Java Custom Module unexpectedly failed. This is now handled.

94069: Unable to create reports (single/multiple results)

Report generation was failing because some Firefox 10 requests were being gated by the new UA restrictions. Add a better bypass for report generation.

93983: SSL handshake error during playback

This fix ensures that the SSL Protocols selected in the UI are respected in the target and that SSL Socket factory actually returns the expected SSL Socket.

93866: Cookies parsed incorrectly

CloudTest unexpectedly forked a cookie on a given site into four separate cookies, resulting in this error.

93238: Error is displayed while loading or playing the composition when large value is saved in track level custom property

Composition Editor server communication would breakdown when more than 2 MB of data was passed at a time. Now, a multi-part content mechanism will prevent this eventuality.

**93111: Running clip that calls comps cause error
"getCompositionOverviewTopLevelData java.lang.NullPointerException"**

An exception occurred while running a clip that calls 4 nested compositions if each nested composition loaded the same clip running the same GET.

93265: Incompatible Version on Azure servers just after bringing up the grid

A grid with mixed Azure builds unexpectedly failed

92921: Monitor Custom Command, Arguments field size is too small

The Monitor Definition Wizard, Custom Command, Argument column now supports longer arguments. Users can still refer to external shell scripts as in prior releases to improve readability.

92508: Proxy authentication change cause CT to show grey screen

If the underlying proxy settings for a network on which a CloudTest appliance was running, then CloudTest login dialog provided no chance to re-enter proxy settings.

Now, if a user has their proxy settings (the address, or the credentials) changed, CloudTest will log them out, and proxy setting fields will appear.

92464: When Dragging WebSocket Event Handlers around the clip editor complains and things just disappear

Using drag-and-drop to drag WebSocket Event Handlers in the Clip Editor would result in quirky behavior, and in some cases the handler object would disappear.

92452: Saving a WebSocket Extraction on a "WebSocket Event Handler" fails

Saving a WebSocket extraction from the Clip Editor lower panel would unexpectedly fail.

92355: Error when opening Monitor View Analytics and other areas

This error could occur in some cases when opening the View Analytics link shown in the Central > Monitors list or while attempting to click the Composition Editor's Status Indicator.

92201: Null error when no available Repository is found in the Server List

When there is no repository service found in the server list (because the caller is not in the same location as the repository) then the Results Service would produce this error. Now, a more user-friendly exception will alert the user of an invalid environment configuration.

91850: Unable to Combine Maximum Collection Duration and Virtual Users Widgets

Two time-based charts with complementary attributes couldn't be combined as expected.

91795: Issues with doing "Save As" on Targets with Authentication

Authentication information was not propagated from a target while using the Save As command, or if propagated would result in subsequent HTTP 401 errors and similar mishaps.

Targets containing authentication information were unexpectedly not saved while using Save As.

91483: Importing a CloudTest Report Template Doc / With Overwrite does not work correctly

This fix updates the underlying routine for importing Word documents.

91166: Request Input and Output is empty for a POST Request and the call fails

A server unexpectedly responded to a POST request with an invalid response after HttpClient rejected its protocol version and its response code because it had bad data in it.

90379: Cannot read property '0' of undefined; JS line 1157

This likely timing error occurred in CloudTest Central.

90346: Selecting Message from Draft Composition Redirects to Actual Page and Exits CT

When executing a draft composition for a clip, selecting a message that was played back when the response page loaded would then cause the browser to be redirected to the actual page and to exist CloudTest entirely.

89877: No Chinese and Japanese text for stats and messages from Maestro

The WebSocket statistical text generated by Maestro was always in English in the prior release but is now localized.

89852: java.lang.NullPointerException while importing a Report Template

This import error would occur if invalid custom input text was specified on the Report Template. This is now handled

89733: Cannot access results saved on main after separate RSDB set as default

After setting up a separate default Results Service Database (RSDB), the results saved on the Main were visible in Central, but would subsequently fail to open.

89566: "ResultsService Service call to a server with no Results Service."

This error occurred while playing a composition from the Jenkins plugin. The ultimate issue here was that the Repository Service binding as constructed within sCommand pointed to the Main and that was invalid. Now, the binding is determined in the underlying code.

89105: Status code may not be negative

This Clip generation error occurred on CloudTest Lite during recording to clip conversion.

89027: Exception: The OpenStack API request failed (500 Internal Server Error)

An HP OpenStack system error wasn't properly handled by CloudTest, which resulted in an unfriendly error message that should not be seen by the end user. Now, the HP error will get logged as expected.

88411: Upgrade to 54 failed on Appliances

Install issues found in 54 version releases on Appliances have now been fully resolved in 55 releases (in addition to an earlier short-term fix introduced within 54 itself).

88126: TypeError: frameElement is null; JS line 2412

Additional null checking code has been added to detect further occurrences of this error.

87804: java.lang.NullPointerException at com.soasta.web.concerto.CompositionEditor.getCompositionForRequest

This null error occurred in the Composition Editor while executing a test on Amazon EC2.

87578: undefined is not a function; JS line 9705

This script error occurred in Central and/or Composition Editor error.

87556: java.lang.NullPointerException:com.soasta.tools

This null error occurred while doing CloudTest recording.

87506: Database 2 does not have a running results service

A Results Service client fault occurred. Now, this exception is caught and a user-friendly error message appears.

87451: undefined is not a function; JS line 468

This Composition Editor error occurred in Chrome only.

87106: Exception: Database 2 does not have a running results service

The error seems to be due to a mucked server list but this has occurred several times. Now, the Server List will be recalculated when this state occurs.

86587: com.soasta.common.resultsservice.ResultsServiceFault: Exception: Invalid nodeContainer 1::2:0:3:: should be: 1::2:1:3:: at com.s

This error was seen while navigating the Result Details dashboard tree.

86472: Error message for "VUs exceeded license max" should clearly indicate it's a license problem

The Virtual Users exceeded license maximum" error message has been clarified for this release to clearly indicate the problem.

86436: null is not an object (evaluating 'bean.errorMessage')

This null error occurred in the Result Details dashboard.

86410: Cannot read property 'innerHTML' of undefined; JS line 2036

This error occurred in the Composition Editor.

86308: Exception: ERROR: relation "eventfact232" does not exist

This error occurred due to a missing event fact that resulted from a deleted result.

86220: Cannot read property 'offsetWidth' of null; JS line 26

This error occurred while trying to determine the size of a scroller container element that didn't exist. This is now handled.

86321: Uncaught ReferenceError: dojo is not defined; JS line 3315

This error occurred in CloudTest Central.

85600: The XML body of this repository object does not match the expected schema: cvc-enumeration-valid: Value 'CUSTOM' is not facet-va

This binary conversion error happened while doing HTTP recording.

85747: com.soasta.common.resultsservice.ResultsServiceFault: Exception: ERROR: relation "containerdimension4531" does not exist

This Results Service error occurred when an underlying layer failed to throw a user-friendly error indicating that a result no longer existed.

85263: sCommand returns the security token is invalid when running comp for more than 5 hours

When running a composition whose play time was longer than 5 hours, the sCommand Utility was unable to return the result as expected because the user security token was by then invalid. Now, sCommand will issue a keep-alive token to prevent invalidation of a token that is in use.

85027: A result with ID '34' does not exist in the Results Server database. - Dashboard Servlet

This error occurred in a CloudTest dashboard, likely due to a deleted result.

84853: Select from Composition builds out Grid for Composition using the wrong server classes

In the prior release during Grid creation, server classes would default to Amazon EC2 classes, thus causing users of other providers additional work. Now, the ability to launch the grid as is for the given selection(s) is presumed.

84772: Handle widget types being removed while creating a widget

This null error would occur if the user created a user defined widget, then subsequently deleted the widget from the list in a second tab. Once deleted, dragging the widget into the dashboard from the first list would result in this error.

84757: Cannot read property 'soastaChart' of undefined

This dashboard loading error occurred when a chart that was undefined couldn't be drawn as a result. Now, all required objects are verified as present before proceeding.

84156: Result Details error

A lower level routine in the Results Details widget was throwing an exception if the result was deleted.

83228: "Exception: Empty key" when trying to use Azure account with null access key

This error occurred when trying to use an Azure account with null access key

83166: Uncaught TypeError: Cannot read property 'select' of undefined; JS line 943

The user was unable to save certification file after an HTTP target's name was changed.

86087: The value for the checkbox for "failed clips" was getting mucked before it was passed to the servlet

The Clip Analysis widget didn't allow exclusion of failed transactions as expected.

84719: No Maestro Service is defined on Main at Amazon EC2 US West (Oregon)

This error happened if a dynamic ramp request was made but a Maestro service was not defined for some reason. It was reproducible by starting a composition, then turning off the Maestro service before then trying to make a dynamic ramp change. Now, a proper error alerts the user of the missing service and no local maestro service when making ramp requests.

84416: Some Azure Cloud Services are not deleted when servers get deleted

CloudTest now ensures that Azure Cloud Resources are deleted during normal grid deployment, and in the event that Azure VM provisioning process fails.

84120: Dimension Data client not correctly handling invalid credentials

Now when creating a new Cloud Provider Account, CloudTest will validate the user entered credentials and warn them if they are invalid. If the CPA already existed and is invalid, the user will now see an Invalid Credentials warning in the Grid Log.

83477: 'undefined' is not a function (evaluating 'this.grid.enableUndoRedo()')

This timing error occurred in the Grid Manager.

83108: Null error while verifying Clip references

This processing error occurred when a null item was passed to a reference method. Now, this is checked before it is used.

83086: Creating a Grid from Composition should allow resizable table header so we can see the names

Table headers in the Grid Manager are now resizable.

82265: java.lang.NullPointerException at com.soasta.web.concerto.ueberdialog.component

This issue likely arose from underlying null If-Then container objects. Now, a new series of checks are in place to prevent this error.

81389: Message in composition is too vague when there is a permission issue

This fix changes the read, write, and use exceptions so that now the object's name is included if the object is a named item, otherwise the object's ID is now included.

80646: FunctionActionEditor.doSave : The XML document is not well-formed

Variations of this Clip Editor lower panel Editor error occurred while working within both message and app action test clips.

80615: css is null; JS line 445

This null error occurred in a CloudTest dashboard.

80385: nodups - Uncaught TypeError: Cannot read property 'id' of null; JS line 1505

This error occurred in the Clip Editor lower panel, Message Editor.

80365: java.lang.NullPointerException at com.soasta.web.concerto.ueberdialog.UeberDialog.init

This null error occurred in the Composition Editor.

80209: Result View doesn't match up with Clip View

For Script objects, the unique name will now be determined just as it is for other clip elements – by name, collection path within the clip, clip repository name, and repository path. However, since Scripts can have local names and that local name will be use in cases where the same script is included within the same parent.

80044: Null error while saving a Seed Data database object

This error occurred while trying to save a database seed data after the draft had been deleted.

79924: A Soap fault has occurred. faultString: The object type 'resultsservicestatusserver' is not recognized

This error occurred in CloudTest Lite Central.

79342: ResultsServiceClientFault: Location CSTC_Beijing does not contain a results service

This error would occur in cases where the Main was in a different location than one or more of the Results Server(s) and if a specific Results Server had no external URL by which it can be contacted.

78845: Current user/tenant does not have permission to read

You can reproduce this by loading a Central list as user A, then in another window logged in as a super user remove all permissions for a certain object in that list for user A, then switch back to the other window and try to open the same object as user A.

78354: For input string: ""

This error occurred in a CloudTest dashboard error.

78190: Target Editor does not handle invalid keystore files

An error occurred in the Target Editor if a keystore file used for authentication was invalid.

77830: Message name exceeds maximum of 255 characters

An issue arose when a message name at the UI level, which was derived from a number of nested ISSEs, exceeded the Repository's maximum allowed characters (e.g. the UI name was not truncated as expected). Now, the UI will check the name length before submitting it to the Repository.

76501: 'undefined' is not an object (evaluating 'a.split')

This null error occurred in a CloudTest dashboard.

73836: Cookie domain matching does not handle leading dots

This change makes our Cookie Session treat domains that are only different in whether or not they have a leading '.' as the same, to avoid duplicate cookies.

72535: 'undefined' is not a function (evaluating 'clearInterval(this.interval)')

This dashboard error was found platform-wide. New pollution check measures were enacted to resolve it.

67282: Moving targets between folders in Central changes the icon

Relocating a target to a new Central > Library folder unexpectedly changed its type icon.

65977: Property Analytics not working

Property aggregates were not getting their property value dimension translated, which could cause problems in larger load tests.

63202: Results database was already loaded

A user-unfriendly message was displayed to an end user. The message will no longer appear.

62555: Reserved IP Address not set to "In-Use" while in use by an Environment or RSDB

The flag to indicate that a Reserved IP Address is in use will now perform as expected.

57158: Composition Builder tree should not allow multi-select

The Composition Editor's lower panel Composition Builder unexpectedly permitted multi-select. 53722: Session Template Package Wizard (STPW) drops its right boundary when you paste into it

The STPW drops the right boundary when you paste it in to the STPW window.

50281: Targets missing from conversion wizard when filter applied

Applying a filter to a message recording revealed a dramatic difference in the number of messages, which subsequent conversion revealed was not as expected—targets were being dropped by the wizard.

46311: Script Editor left margin widens after scrolling past 100th line

The Script Editor left margin would dramatically increase if the script in it exceeded 100 lines. This is now handled.

43817: Exception: java.lang.NullPointerException in ResultsViewer

Timing issues occurred while getting a container dimension.

37647: "Use columns:" error in Seed Data at the Track Level in a composition

Selecting "First" for a Track, was not persisted as expected, but rather "All [Tracks]" would be selected when the user returned to the Data selection UI in the Composition Editor.

6944: Can't set "Error handling" settings for Scripts or Chains

The "error handling" settings in clips were not functioning properly.

TouchTest

93876: TouchTest Lite: New users keep logging out when they try to login after setting up their account in Chrome

After TouchTest Lite users in Google Chrome entered credentials to login via the email registration process, they would be immediately logged out due to an unexpected authorization cookies error.

92885: MakeAppTouchTestable: Ability to specify Binary Executable name as an input argument [\[requires new TouchTestDriver\]](#)

As of this release, the MATT utility will accept the app name specified rather than the name indicated by the project's CDBundleExecutable setting in order to accommodate projects that have targets performing different functions.

91246: Touch test and dialogs with UIDocumentMenuViewController [\[requires new TouchTestDriver\]](#)

This fix adds support for `UIDocumentMenuViewController` in iOS 8 and above. This support includes ONLY those titles added by the developer (i.e. the options you can choose in the menu, not iCloud)

91237: Android_Default screen does not open when we run clips individually [\[requires new TouchTestDriver\]](#)

This fix improves cleanup when we terminate an Android application.

90551: SSL Error on site for Android devices

This SSL error occurred while connecting to a TouchTest Agent URL. This fix adds a log statement to describe SSL Errors in more detail.

86359: Cannot read property 'replace' of undefined

This error occurred in the Composition Editor during replay of a TouchTest.

83407: Cannot delete a Device Agent whose status is: CONNECTED

This error occurred while trying to delete an active Device Agent (e.g. one that was connected at the time). This is now handled with a user-friendly error message.

88587: java.lang.NullPointerException

This dashboard error occurred during runtime of a mobile test composition.

86458: Particular locator does not work on Samsung Galaxy S3 version 4.3

The Touch Locator was unable to parse a specific locator on this device and model while running Android 4.3.

84960: TypeError: \$.widget is not a function; JS line 2:

This dashboard error occurred during runtime of a mobile test composition and includes better jQuery instantiation.

81884: da1 is not defined; JS line 1192

This error occurred while working on a WSDL target in the Target Editor on TouchTest Lite.